



# CLAUDETTE & DEAN'S PLACE DARE DEVILS

IF YOU HAVE ANY QUESTION CONTACT:  
MIKE HUMPHREY (207)432-7714 OR

[riversidegroveton@gmail.com](mailto:riversidegroveton@gmail.com)

WITH SAFETY AND FAIR COMPETITION BEING OUR TOP PRIORITIES  
IN THIS DIVISION. IT WILL BE CLOSELY MONITORED FOR ANY TECH  
ISSUES.

**YOU CAN EXPECT TO SEE SOME RULE CHANGES  
AND UPDATES AS THE YEAR GOES ON.  
IF IT DOES NOT SAY YOU CAN, DO NOT DO IT!!**

## **DRIVER ELIGIBILITY:**

10 to 14 YEARS OF AGE (8, 9, 15, & 16 UPON TRACK APPROVAL) CONTACT MIKE  
HUMPHREY 207-432-7714

CAR MUST HAVE A PAID RIVERSIDE SPEEDWAY REGISTRATION

## **DIVISION RULES**

*The Dare Devils division is intended to restrict cars to a safe speed, solely in the discretion and opinion of Speedway management and administrators. Events may be shortened or ceased at anytime, and/or drivers may be removed from events at any time, if the Speedway determines that safe speed margins are exceeded. By participating, teams, parents, crews and drivers agree to any methods or speed controls and agree to peaceably and agreeable adhere to those regulations in the overall interest of driver safety, education and a positive experience.*

## **ELIGIBILITY**

### **1. CAR**

A. Car must have a paid Riverside Speedway registration.

Updated 12/17/19

- B. All cars must be neat appearing. Cars should be painted with contrasting colors and have appropriate numbers and lettering.
- C. Four cylinder cars only.
- D. Max wheelbase of 104.5
- E. No leaf spring cars permitted.
- F. Two wheel drive cars only.
- G. Cars with T-tops or convertibles are NOT permitted. A sun roof must be removed and replaced with min 22 gauge steel.
- H. NO TYPE R HONDA CIVIC ALLOWED.

## **2. ENGINE**

- A. Four cylinder only. No turbo or supercharged engines allowed.
- B. Engine must be stock for year, make, model and generation of car.
- C. Max engine bore size is 0.40 over stock.
- D. Max cylinder head decking is 0.10 off stock.
- E. Stock cams only.
- F. No porting or polishing.
- G. Stock intakes and throttle bodies. NO mixing and matching different years and generations.
- H. Stock engine wire harness for year, make, model and generation only.
- I. No computer or ECU programming or chipping. Stock computers only.
- J. Stock air filter and box, other than spectra 9100 or 9800 only.
- K. Radiator overflow is MANDATORY.
- L. No cold air intakes allowed.

## **3. EXHAUST**

- A. No Headers
- B. Functional Muffler
- C. Exhaust must dump out behind driver and under the car.

## **4. TRANSMISSION**

- A. No limited slip or locking transmissions or differentials allowed
- B. No LSD TRANSMISSIONS even if the car comes stock from the factory with one.
- C. Rear wheeled cars must have a minimum of 2 drive shafts loops.
- D. Drive shafts must be painted white.
- E. No alterations of fly-wheel, clutch, transmissions, rear ends. All components must remain stock.

## **5. WEIGHTS AND PENALTIES**

- A. JDM ENGINES will be required to carry 75 lbs additional weight.
- B. Dual cam cars will be required to carry 50 lbs additional weight
- C. Honda Civic 2004 and up with DOHC will be required to carry 75lbs additional weight.
- D. ALL WEIGHT PENALTIES DESCRIBED IN 4A,B,and C WILL BE MOUNTED TO THE RIGHT FRONT FLOOR BOARD AND WILL BE TOUCHING THE INNER ROCKER PANEL. WEIGHT WILL BE MOUNTED USING THE SANDWICH METHOD WITH A STEEL PLATE UNDER THE FLOORBOARD AND BOLTING UP THROUGH FLOORBOARD AND LEAD.
- E. Minimum weight, race ready with driver is 2300lbs
- F. Max left side percentage with driver and gear is 54% before, during, and after each event with zero tolerance.
- G. Weights and penalties may be adjusted at any time by RIVERSIDE SPEEDWAY in fairness of competition.

## **6. EXTERIOR**

- A. All glass must be removed , except windshield. Windshield may be replaced with lexan minimum of 1/8"
- B. Must have secure hook front and rear for towing
- C. All doors must be welded shut.
- D. Hood and trunk must be secured shut with a min of two hood pins each.
- E. Stock front and rear bumpers for make,model and year must remain in place.
- F. Aftermarket bumper covers are allowed.
- G. All body panels must remain stock for make and model year.
- H. Rocker panels may not go below stock rocker or pinch weld.
- I. Minimum 5" spoiler, no boxing the ends

## **7. BATTERY**

- A. Must remain under the hood and be covered.

## **8. FUEL TANK**

- A. Minimum of 8 gallon fuel tank.
- B. Stock may be replaced with a boat tank or fuel cell must be enclosed in a steel canister. Made of minimum of 22 gauge steel.

Updated 12/17/19

- C. Tank must be securely fastened incenter of trunk with a minimum of 4 straps made out of minimum 1 x 1½” flat bar
- D. With a PVC valve on vent line.
- E. A steel fire wall must separate any fuel tank from driver’s compartment.
- F. Fuel Cell may not be lower than 12 inches from the bottom of the cell to the ground if mounted outside of trunk.
- G. Fuel lines must be in conduit if inside the drivers compartment

## 9. INTERIOR

- A. Aluminum racing seat **MANDATORY**. Must be safely mounted in stock location and connected to the roll cage in a safe and secure manner. A support seat brace must be installed at the rear of the seat.
- B. Mirrors allowed.
- C. Passenger and rear seats must be removed.
- D. Original stock floor boards must remain in place. Any holes will be patched with sheet metal.
- E. Floor upholstery must be removed.
- F. Stock dash may be removed.
- G. Steering wheel center must be padded.
- H. QUICK RELEASE STEERING HUB MANDATORY.
- I. Steering shaft maybe made of approved steering shaft tubing.
- J. Stock column is allowed.

## 10. SAFETY

- A. RACING SEAT BELTS ARE MANDATORY
- B. MINIMUM 5 POINT HARNESS
- C. NO MORE THAN 5 YEARS OLD. IF THE TAG IS GONE OR NOT LEGIBLE, THE SAFETY BELTS WILL NOT BE USED AND WILL BE CHANGED OUT AT THE DISCRETION OF THE TECH OFFICIALS. **THIS IS A MAJOR SAFETY ISSUE THAT CAN NOT BE TAKEN LIGHTLY.**
- D. MANDATORY FIRE SUIT ( SINGLE LAYER MIN)
- E. RACING GLOVES MANDATORY
- F. RACING SHOES MANDATORY
- G. HEAD AND NECK RESTRAINT MANDATORY(MINIMUM OF A HORSE COLLAR TYPE)
- H. DOT APPROVED HELMET
- I. RACE RECEIVERS ARE MANDATORY

Updated 12/17/19

- J. ANY VEHICLE WITH ELECTRIC FUEL PUMP MUST HAVE A MASTER DISCONNECT IN REACH OF DRIVER AND SAFETY OFFICIALS. THIS IS MANDATORY
- K. WINDOW NET WITH QUICK RELEASE MANDATORY

## 11. FIRE EXTINGUISHER MANDATORY

- A. MUST BE IN REACH OF DRIVER WHILE BUCKLED IN SEAT

## 12. ROLL CAGE

- A. Roll Cage is **MANDATORY**
- B. Minimum size of roll cage tubing is 1 ½", .095 thickness
- C. All driver's area must be padded.
- D. Unibody car frames may be connected front to rear as long as both sides are done equally the same.
- E. Must consist of four uprights joined together at the top, plus an "X" between the rear of the back uprights.
- F. Rear supports bars are required, running diagonally from each rear bar of the cage and may extend to the rear of the frame horns, and may be reinforced between the frame horns.
- G. Four horizontal bars between the upright bracing on the driver's side are required and those 4 bars must be bowed outward. The inner door panels may be removed to allow for the outward curving of the horizontal door bars if necessary.
- H. There must also be a minimum of 3 horizontal bars - or and "X"- between the upright bracing on the passenger 4 side.
- I. A horizontal bar between the two front uprights at dashboard level is required.
- J. A front bracing hoop may extend from the frame rail in front of the strut towers and connect to a bar protecting the radiator but not connect to the strut towers in any way.
- K. The radiator protecting bar may be a maximum of 1/34" O.D.
- L. Two rearward bracing pipes from the back of the roll cage on each side to half way up the unibody rear frame and top of the unibody rear frame are allowed. They must not extend beyond the spring perch and must be equal length and do not reinforce or alter the geometry of the car in any way.
- M. All pipes must be welded all the way around at every joint.

Updated 12/17/19

- N. Cars with a frame must have cage welded to frame and NOT the floorboards.
- O. Cars without frames may use the “sandwich” method or may attach the cage upright to a section max 2 ½” by 2 ½” or 2” x 3” .120 steel tubing. The tubing must be visible inside the cockpit and may not extend more than 2” beyond any upright.

### **13. SET UP AND SUSPENSION**

- A. All cars must have 4 working brakes.
- B. Sway bar and links must be equally the same side to side
- C. Sway bar must be OEM no aftermarket.
- D. Max 2” camber on right front. Measured off wheel with Riverside Speedway gauge
- E. Minimum ride height 5” at the lowest point of car with driver in seay.
- F. Maximum ½” difference in wheel base side to side,
- G. No rear end adjustments
- H. Any coil spring is allowed. No altering of chassis or suspension to fit spring.
- I. No coil bind
- J. 2 spring rubbers per car.
- K. Stock camber only on rear.
- L. Lead must be painted white and have car number on it.
- M. No lead be mounted beyond center line of front or rear axle.
- N. Suspension & steering bushings will not be altered in any way from the stock original intended use of the bushing. Examples of alteration will be include but are not limited to: chemical treatment, heat treatment, weakening of the bushing by any means other than normal racing wear.

### **14. WHEELS AND TIRES**

- A. **STOCK WHEEL FOR MAKE, MODEL OF CAR ALLOWED.**
- B. **ALL WHEELS MUST HAVE SAME OFFSET**
- C. **MAXIMUM 7” WIDTH WHEEL.**
- D. **1 INCH LUG NUTS ARE MANDATORY ON ALL STEEL WHEELS**
- E. **PASSENGER CAR RADIAL TIRES ONLY. STREET RADIALS MUST BE DOT TIRES. NO HIGH PERFORMANCE TIRES INCLUDING V OR Z RATED OR COMPARABLE PERFORMANCE TIRES. NO RECAPS, OR STUDDERED TIRES. ALL TIRES MUST BE APPROVED BY RIVERSIDE SPEEDWAY TECH OFFICIALS.**

- F. MINIMUM TREAD WEAR 400**
- G. YOU MAY RUN ANY 60 SERIES TIRE.**
- H. ALL FOUR TIRES MUST BE THE SAME SIZE**
- I. NO CAMBER CUTTING, SHAVING, OR BUFFING ALLOWED**
- J. DOES NOT MATTER WHAT SIZE TIRES ARE AVAILABLE FOR YOUR VEHICLE, 60 SERIES TIRES ARE MAXED.**
- K. THE TIRE MUST REMAIN ON THE INSIDE OF THE STOCK INTENDED WHEEL WELL**

## **15. MUSTANG OPTION**

- A. No 1994 or newer gen 3 Mustangs will be allowed.
- B. Minimum weight, race ready with driver is 2300lbs
- C. Max left side percentage with driver and gear is 55% before, during, and after each event with zero tolerance.
- D. Weights and penalties may be adjusted at any time by RIVERSIDE SPEEDWAY in fairness of competition.
- E. Mustangs will be allowed to use cam with hydraulic lifters, max intake and exhaust valve lift not to exceed .442"
- F. The "WRC Automotive" front clip is approved for Mustangs, made of .083 tubing. All sway bars must remain in stock location.
- G. Plastic nose piece part number PN25005Rx and part number PN25005Lx for Mustangs are allowed.
- H. Five Star Manufactured body package part number 915-101S will be allowed. Must be used in its entirety.
- I. A Schoenfield header part number F238V will be allowed stock out of the box and Must remain a 2" exhaust directly after header, No Exceptions.
- J. Stock or OEM replacement pistons allowed for make and model k pistons part #KB217/KB217-010/KB217-020/KB217-030/KB217-040. Wiseco piston #K120A/K120A4 allowed.
- K. Boring of cylinders allowed to .040 max.
- L. Stock connecting rods allowed.
- M. Stock crankshafts only (no lightened or performance balanced cranks allowed).
- N. Any resurfacing of cylinder heads must have shim to bring back to tolerance. I.E. clean .010 from head .010 shim must be used.
- O. Minimum cylinder head deck height 3.760" measured from valve cover to rail to bottom of deck. .006" piston to engine block deck height. Any measurement below .006" must be compensated with proper shim or

Updated 12/17/19

gasket. .055" minimum head gasket thickness. Cometic head gaskets allowed.

P. Stock carburetor or fuel injection system only.

**Everything about the car must remain stock for the year, make, and model except what is in the rules above.**

**THANK YOU FOR YOUR SUPPORT. ALL RULES WERE MADE FOR YOUR SAFETY FIRST AND A FUN, FAIR, RACING ENVIRONMENT FOR ALL.**

**Disclaimer:**

The rules and/or regulations set forth herein are designed to provide for the orderly conduct of racing events and to establish minimum acceptable requirements for such events. These rules shall govern the condition of all events, and, by participating in these events, all participants are deemed to have accepted and complied with these rules. NO EXPRESSED OR IMPLIED WARRANTY OF SAFETY SHALL RESULT FROM PUBLICATION OF OR COMPLIANCE WITH THESE RULES AND REGULATIONS. They are intended solely as a guide for the conduct of the sport and are in no way a guarantee against injury or death to a participant, spectator, or official. Any interpretation or deviation of these rules is left to the discretion of tech and the decision is final. NO EXPRESSED OR IMPLIED WARRANTY OF SAFETY SHALL RESULT FROM SUCH DEVIATION OF SPECIFICATIONS.



# FORMULA FOUR TRANSPONDER MOUNTING LOCATION

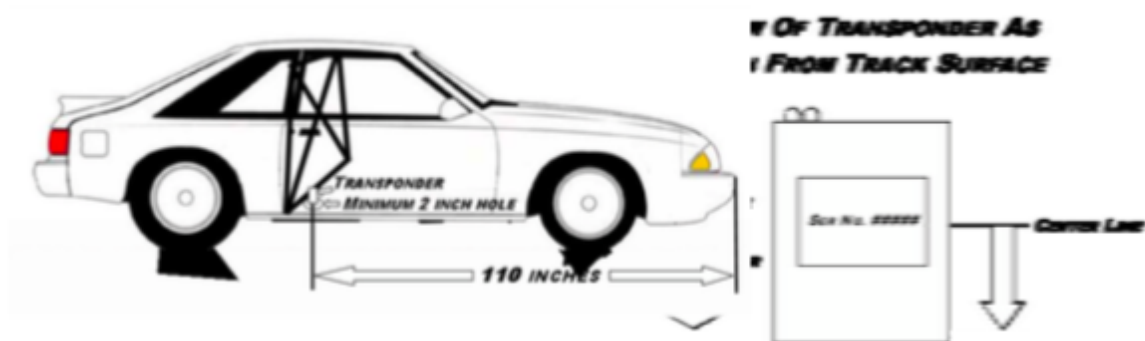


DIAGRAM #1

DIAGRAM #2

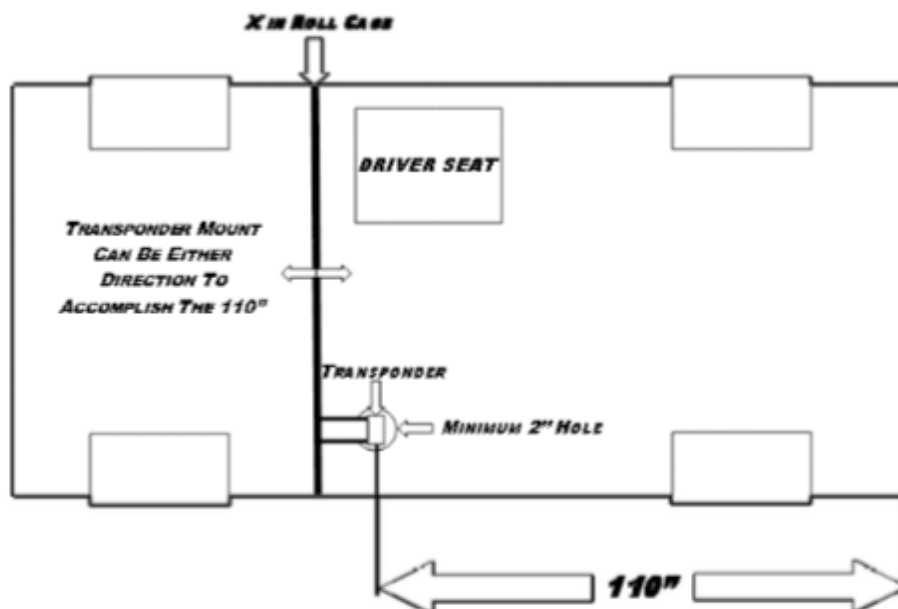


Diagram #3